
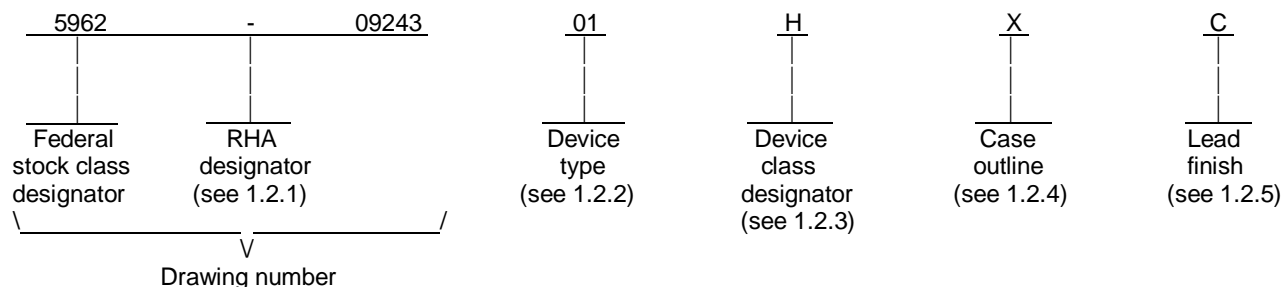


REVISIONS																			
LTR	DESCRIPTION										DATE (YR-MO-DA)				APPROVED				
A	Add class K product. 1.2.2, generic number, remove the "/H" from each of the device types. 1.3: Output power, add note 2. Junction temperature, change "to" with "above". Table I, note 2, add T _C . Table II: Interim electrical parameters, add subgroups 1 and 4, Group C end-point electrical parameters, add subgroups 5 and 6. -gz										10-07-15				Charles F. Saffle				
B	Paragraph 1.3: Remove "Power dissipation" and "Output power" Table I: Correct conditions column for "Output voltage" test. Update drawing paragraphs. -gc										14-06-26				Charles F. Saffle				
C	Updated drawing to the latest requirements of MIL-PRF-38534. -sld										20-01-21				James R. Eschmeyer				
																			
REV																			
SHEET																			
REV																			
SHEET																			
REV STATUS					REV		C	C	C	C	C	C	C	C	C	C			
OF SHEETS					SHEET		1	2	3	4	5	6	7	8	9	10			
PMIC N/A					PREPARED BY Gary Zahn					DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990 https://www.dla.mil/LandandMaritime									
STANDARD MICROCIRCUIT DRAWING THIS DRAWING IS AVAILABLE FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE AMSC N/A					CHECKED BY Greg Cecil														
					APPROVED BY Charles F. Saffle														
					DRAWING APPROVAL DATE 09-11-05														
					REVISION LEVEL C					SIZE A	CAGE CODE 67268		5962-09243						
										SHEET		1 OF 10							

1. SCOPE

1.1 Scope. This drawing documents five product assurance classes as defined in paragraph 1.2.3 and MIL-PRF-38534. A choice of case outlines and lead finishes which are available and are reflected in the Part or Identifying Number (PIN). When available, a choice of radiation hardness assurance levels are reflected in the PIN.

1.2 PIN. The PIN is as shown in the following example:



1.2.1 Radiation hardness assurance (RHA) designator. RHA marked devices meet the MIL-PRF-38534 specified RHA levels and are marked with the appropriate RHA designator. A dash (-) indicates a non-RHA device.

1.2.2 Device types. The device types identify the circuit function as follows:

<u>Device type</u>	<u>Generic number</u>	<u>Circuit function</u>
01	DVCH2805D	DC-DC converter, 1.5 W, ± 5.0 V outputs
02	DVCH2812D	DC-DC converter, 1.5 W, ± 12 V outputs
03	DVCH2815D	DC-DC converter, 1.5 W, ± 15 V outputs

1.2.3 Device class designator. This device class designator is a single letter identifying the product assurance level. All levels are defined by the requirements of MIL-PRF-38534 and require QML Certification as well as qualification (Class H, K, and E) or QML Listing (Class G and D). The product assurance levels are as follows:

<u>Device class</u>	<u>Device performance documentation</u>
K	Highest reliability class available. This level is intended for use in space applications.
H	Standard military quality class level. This level is intended for use in applications where non-space high reliability devices are required.
G	Reduced testing version of the standard military quality class. This level uses the Class H screening and In-Process Inspections with a possible limited temperature range, manufacturer specified incoming flow, and the manufacturer guarantees (but may not test) periodic and conformance inspections (Group A, B, C, and D).
E	Designates devices which are based upon one of the other classes (K, H, or G) with exception(s) taken to the requirements of that class. These exception(s) must be specified in the device acquisition document; therefore the acquisition document should be reviewed to ensure that the exception(s) taken will not adversely affect system performance.
D	Manufacturer specified quality class. Quality level is defined by the manufacturers internal, QML certified flow. This product may have a limited temperature range.

STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE A		5962-09243
		REVISION LEVEL C	SHEET 2

1.2.4 Case outline. The case outline is as designated in MIL-STD-1835 and as follows:

<u>Outline letter</u>	<u>Descriptive designator</u>	<u>Terminals</u>	<u>Package style</u>
X	See figure 1	7	Dual-in-line (leads are glass sealed)

1.2.5 Lead finish. The lead finish is as specified in MIL-PRF-38534.

1.3 Absolute maximum ratings. 1/

Input voltage (continuous)	+50 V dc
Input voltage (transient, 1 second)	+80 V dc
Junction temperature rise above case	+5°C
Storage temperature range	-65°C to +150°C
Lead temperature (soldering, 10 seconds)	+270°C

1.4 Recommended operating conditions.

Input voltage range	+12 V dc to +50 V dc
Case operating temperature range (T _C).....	-55°C to +125°C

2. APPLICABLE DOCUMENTS

2.1 Government specification, standards, and handbooks. The following specification, standards, and handbooks form a part of this drawing to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATION

MIL-PRF-38534 - Hybrid Microcircuits, General Specification for.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-883 - Test Method Standard Microcircuits.
MIL-STD-1835 - Interface Standard for Electronic Component Case Outlines.

DEPARTMENT OF DEFENSE HANDBOOKS

MIL-HDBK-103 - List of Standard Microcircuit Drawings.
MIL-HDBK-780 - Standard Microcircuit Drawings.

(Copies of these documents are available online at <https://quicksearch.dla.mil/>)

2.2 Order of precedence. In the event of a conflict between the text of this drawing and the references cited herein, the text of this drawing takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

1/ Stresses above the absolute maximum ratings may cause permanent damage to the device. Extended operation at the maximum levels may degrade performance and affect reliability.

STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE A		5962-09243
		REVISION LEVEL C	SHEET 3

3. REQUIREMENTS

3.1 Item requirements. The individual item performance requirements for device classes D, E, G, H, and K shall be in accordance with MIL-PRF-38534. Compliance with MIL-PRF-38534 shall include the performance of all tests herein or as designated in the device manufacturer's Quality Management (QM) plan or as designated for the applicable device class. The manufacturer may eliminate, modify or optimize the tests and inspections herein, however the performance requirements as defined in MIL-PRF-38534 shall be met for the applicable device class. In addition, the modification in the QM plan shall not affect the form, fit, or function of the device for the applicable device class.

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-PRF-38534 and herein.

3.2.1 Case outline. The case outline shall be in accordance with 1.2.4 herein and figure 1.

3.2.2 Terminal connections. The terminal connections shall be as specified on figure 2.

3.3 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in table I and shall apply over the full specified operating temperature range.

3.4 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table II. The electrical tests for each subgroup are defined in table I.

3.5 Marking of devices. Marking of devices shall be in accordance with MIL-PRF-38534. The device shall be marked with the PIN listed in 1.2 herein. In addition, the manufacturer's vendor similar PIN may also be marked.

3.6 Data. In addition to the general performance requirements of MIL-PRF-38534, the manufacturer of the device described herein shall maintain the electrical test data (variables format) from the initial quality conformance inspection group A lot sample, for each device type listed herein. Also, the data should include a summary of all parameters manually tested, and for those which, if any, are guaranteed. This data shall be maintained under document revision level control by the manufacturer and be made available to the preparing activity (DLA Land and Maritime-VA) upon request.

3.7 Certificate of compliance. A certificate of compliance shall be required from a manufacturer in order to supply to this drawing. The certificate of compliance (original copy) submitted to DLA Land and Maritime-VA shall affirm that the manufacturer's product meets the performance requirements of MIL-PRF-38534 and herein.

3.8 Certificate of conformance. A certificate of conformance as required in MIL-PRF-38534 shall be provided with each lot of microcircuits delivered to this drawing.

4. VERIFICATION

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with MIL-PRF-38534 or as modified in the device manufacturer's Quality Management (QM) plan. The modification in the QM plan shall not affect the form, fit, or function as described herein.

4.2 Screening. Screening shall be in accordance with MIL-PRF-38534. The following additional criteria shall apply:

a. Burn-in test, method 1015 of MIL-STD-883.

(1) Test condition A, B, C, or D. The test circuit shall be maintained by the manufacturer under document revision level control and shall be made available to either DLA Land and Maritime-VA or the acquiring activity upon request. Also, the test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in method 1015 of MIL-STD-883.

(2) T_A as specified in accordance with table I of method 1015 of MIL-STD-883.

b. Interim and final electrical test parameters shall be as specified in table II herein, except interim electrical parameter tests prior to burn-in are optional at the discretion of the manufacturer.

STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE A		5962-09243
		REVISION LEVEL C	SHEET 4

TABLE I. Electrical performance characteristics.

Test	Symbol	Conditions -55°C ≤ T _C ≤ +125°C V _{IN} = +28 V dc ±5% full load unless otherwise specified	Group A subgroups	Device types	Limits		Unit
					Min	Max	
Output voltage <u>1/</u>	+V _{OUT}	+I _{OUT} , -I _{OUT} = 0.15 A	1	01	4.95	5.05	V dc
			2,3		4.80	5.20	
		+I _{OUT} , -I _{OUT} = 0.0625 A	1	02	11.88	12.12	
			2,3		11.52	12.48	
		+I _{OUT} , -I _{OUT} = 0.05 A	1	03	14.85	15.15	
			2,3		14.40	15.60	
	-V _{OUT}	+I _{OUT} , -I _{OUT} = 0.15 A	1	01	-4.95	-5.05	
			2,3		-4.80	-5.20	
		+I _{OUT} , -I _{OUT} = 0.0625 A	1	02	-11.88	-12.12	
			2,3		-11.52	-12.48	
		+I _{OUT} , -I _{OUT} = 0.05 A	1	03	-14.85	-15.15	
			2,3		-14.40	-15.60	
Output current <u>2/ 3/</u>	I _{OUT}	Either output	1,2,3	01		0.24	A
				02		0.1	
				03		0.08	
V _{OUT} ripple voltage	V _{RIP}	BW = 20 Hz to 10 MHz	1,2,3	01		50	mVp-p
				02,03		100	
V _{OUT} line regulation	V _{RLINE}	±V _{OUT} , V _{IN} = 12 V dc to 50 V dc	1,2,3	All		150	mV
V _{OUT} load regulation	V _{RLOAD}	10% load to full load	1,2,3	01		400	mV
		50% load to full load		02,03		700	
				All		250	
Input current	I _{IN}	I _{OUT} = 0, Inhibit (pin 7) = 0	1,2,3	All		3.5	mA
		I _{OUT} = 0, Inhibit (pin 7) = open		01		10	
				02		12	
				03		14	
I _{IN} ripple current	I _{RIP}	BW = 20 Hz to 10 MHz	1,2,3	All		30	mAp-p

See footnotes at end of table.

**STANDARD
MICROCIRCUIT DRAWING**

DLA LAND AND MARITIME
COLUMBUS, OHIO 43218-3990

SIZE
A

REVISION LEVEL
C

5962-09243

SHEET
5

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions -55°C ≤ T _C ≤ +125°C V _{IN} = +28 V dc ±5% full load unless otherwise specified	Group A subgroups	Device types	Limits		Unit
					Min	Max	
Efficiency	Eff		1,2,3	01	72		%
				02	74		
				03	74		
Isolation	ISO	500 V dc, T _c = +25°C	1	All	100		MΩ
Capacitive load <u>4/</u>	C _L	No effect on DC performance, T _c = +25°C	1	01		500	μF
				02,03		200	
Short circuit power dissipation	P _D	Short circuit	1,2,3	01		4	W
				02,03		4.5	
Switching frequency	F _S		1,2,3	All	325	475	kHz
V _{OUT} step load transient	V _{TLOAD}	50% load to 100% load	4,5,6	All		300	mV pk
V _{OUT} step load transient recovery <u>5/</u>	TT _{LOAD}	50% load to 100% load	4,5,6	01		500	μs
				02,03		400	
V _{OUT} step line transient <u>4/</u>	V _{TLINE}	V _{IN} = 12 V dc to 50 V dc	4,5,6	01		400	mV pk
				02,03		600	
V _{OUT} step line transient recovery <u>4/</u> <u>5/</u>	TT _{LINE}	V _{IN} = 12 V dc to 50 V dc	4,5,6	All		600	μs
Start up overshoot	V _{tonOS}	V _{IN} = 0 V dc to 5 V dc	4,5,6	01		25	mV pk
				02,03		50	
Start up delay	T _{onD}	V _{IN} = 0 V dc to 28 V dc	4,5,6	All		20	ms

1/ Half load at +V_{OUT} and half load at -V_{OUT}.

2/ Derate linearly to 0 at T_C = +135°C.

3/ Up to 70 percent of the total power or current can be drawn from either one of the two outputs.

4/ Parameter shall be tested as part of device characterization and after design and process changes. Thereafter, parameters shall be guaranteed to the limits specified in table I.

5/ Time for V_{OUT} to settle within ±1 percent of its final value.

**STANDARD
MICROCIRCUIT DRAWING**

DLA LAND AND MARITIME
COLUMBUS, OHIO 43218-3990

SIZE
A

REVISION LEVEL
C

5962-09243

SHEET
6

Case outline X.

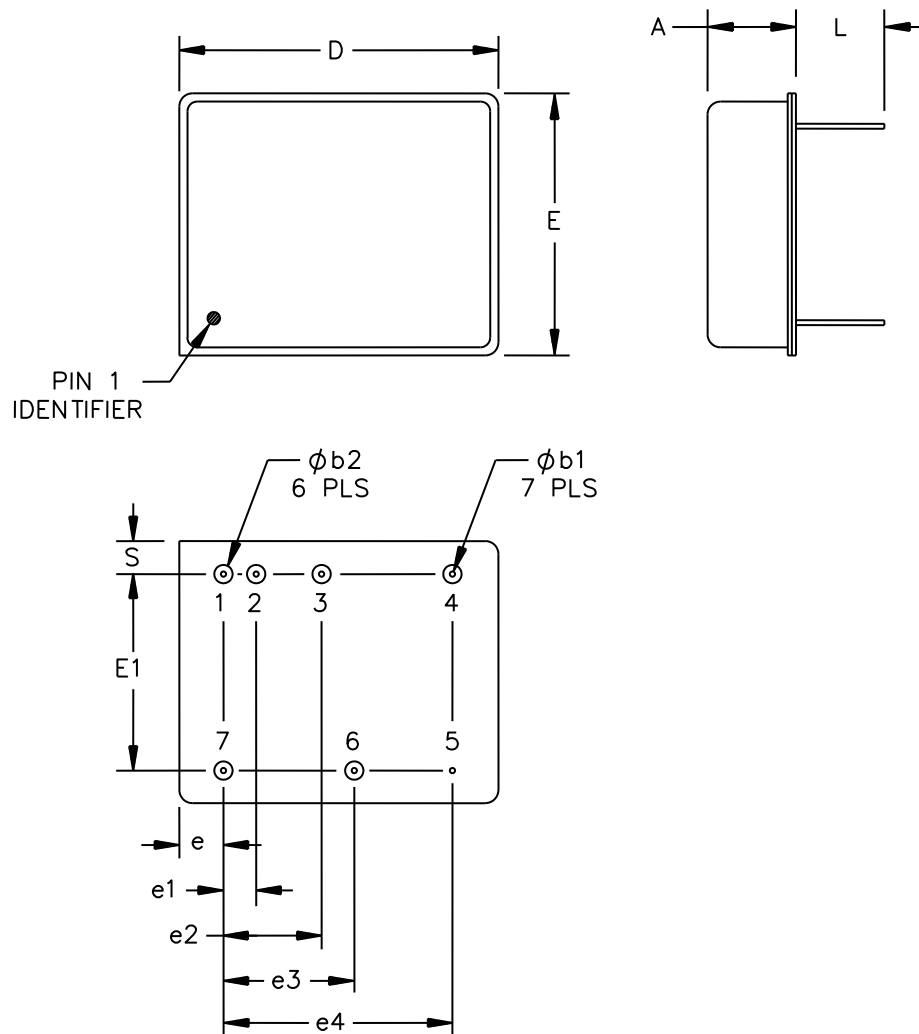


FIGURE 1. Case outline.

**STANDARD
MICROCIRCUIT DRAWING**

DLA LAND AND MARITIME
COLUMBUS, OHIO 43218-3990

SIZE
A

REVISION LEVEL
C

5962-09243

SHEET
7

Case outline X - Continued.

Symbol	Millimeters		Inches	
	Min	Max	Min	Max
A		6.86		.270
øb1	0.41	0.51	.016	.020
øb2	1.37	1.47	.054	.058
D		24.77		.975
E		20.32		.800
E1	15.11	15.37	.595	.605
e	3.30	3.56	.130	.140
e1	2.41	2.67	.095	.105
e2	7.49	7.75	.295	.305
e3	10.03	10.29	.395	.405
e4	17.65	17.91	.695	.705
L	6.48	7.24	.255	.285
S	2.34	2.59	.092	.102

NOTES:

1. The U. S. Government preferred system of measurement is the metric SI. This item was designed using inch-pound units of measurement. In case of problems involving conflicts between the metric and inch-pound units, the inch-pound units shall take precedence.
2. Pin numbers are for reference only.
3. Case outline X weight: 11 grams maximum.

FIGURE 1. Case outline - Continued.

Device types	All
Case outline	X
Terminal numbers	Terminal symbols
1	28 V IN
2	IN common
3	+V _{OUT}
4	OUT common
5	Case
6	-V _{OUT}
7	Inhibit

FIGURE 2. Terminal connections.

STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE A		5962-09243
		REVISION LEVEL C	SHEET 8

TABLE II. Electrical test requirements.

MIL-PRF-38534 test requirements	Subgroups (in accordance with MIL-PRF-38534, group A test table)
Interim electrical parameters	1, 4
Final electrical parameters	1*, 2, 3, 4, 5, 6
Group A test requirements	1, 2, 3, 4, 5, 6
Group C end-point electrical parameters	1, 2, 3, 4, 5, 6
End-point electrical parameters for Radiation Hardness Assurance (RHA) devices	Not applicable

* PDA applies to subgroup 1.

4.3 Conformance and periodic inspections. Conformance inspection (CI) and periodic inspection (PI) shall be in accordance with MIL-PRF-38534 and as specified herein.

4.3.1 Group A inspection (CI). Group A inspection shall be in accordance with MIL-PRF-38534 and as follows:

- a. Tests shall be as specified in table II herein.
- b. Subgroups 7, 8, 9, 10, and 11 shall be omitted.

4.3.2 Group B inspection (PI). Group B inspection shall be in accordance with MIL-PRF-38534.

4.3.3 Group C inspection (PI). Group C inspection shall be in accordance with MIL-PRF-38534 and as follows:

- a. End-point electrical parameters shall be as specified in table II herein.
- b. Steady-state life test, method 1005 of MIL-STD-883.
 - (1) Test condition A, B, C, or D. The test circuit shall be maintained by the manufacturer under document revision level control and shall be made available to either DLA Land and Maritime-VA or the acquiring activity upon request. Also, the test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in method 1005 of MIL-STD-883.
 - (2) T_A as specified in accordance with table I of method 1005 of MIL-STD-883.
 - (3) Test duration: 1,000 hours, except as permitted by method 1005 of MIL-STD-883.

4.3.4 Group D inspection (PI). Group D inspection shall be in accordance with MIL-PRF-38534.

4.3.5 Radiation Hardness Assurance (RHA) inspection. RHA inspection is not currently applicable to this drawing.

STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE A		5962-09243
		REVISION LEVEL C	SHEET 9

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-PRF-38534.

6. NOTES

6.1 Intended use. Microcircuits conforming to this drawing are intended for use for Government microcircuit applications (original equipment), design applications, and logistics purposes.

6.2 Replaceability. Microcircuits covered by this drawing will replace the same generic device covered by a contractor-prepared specification or drawing.

6.3 Configuration control of SMD's. All proposed changes to existing SMD's will be coordinated as specified in MIL-PRF-38534.

6.4 Record of users. Military and industrial users should inform DLA Land and Maritime when a system application requires configuration control and the applicable SMD to that system. DLA Land and Maritime will maintain a record of users and this list will be used for coordination and distribution of changes to the drawings. Users of drawings covering microelectronic devices (FSC 5962) should contact DLA Land and Maritime-VA, telephone (614) 692-8108.

6.5 Comments. Comments on this drawing should be directed to DLA Land and Maritime-VA, Columbus, Ohio 43218-3990, or telephone (614) 692-1081.

6.6 Sources of supply. Sources of supply are listed in MIL-HDBK-103 and QML-38534. The vendors, listed in MIL-HDBK-103 and QML-38534, have submitted a certificate of compliance (see 3.7 herein) to DLA Land and Maritime-VA and have agreed to this drawing.

STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE A		5962-09243
		REVISION LEVEL C	SHEET 10

STANDARD MICROCIRCUIT DRAWING BULLETIN

DATE: 20-01-21

Approved sources of supply for SMD 5962-09243 are listed below for immediate acquisition information only and shall be added to MIL-HDBK-103 and QML-38534 during the next revisions. MIL-HDBK-103 and QML-38534 will be revised to include the addition or deletion of sources. The vendors listed below have agreed to this drawing and a certificate of compliance has been submitted to and accepted by DLA Land and Maritime-VA. This information bulletin is superseded by the next dated revisions of MIL-HDBK-103 and QML-38534. DLA Land and Maritime maintains an online database of all current sources of supply <https://landandmaritimeapps.dla.mil/programs/Smcr/>.

Standard microcircuit drawing PIN <u>1/</u>	Vendor CAGE number	Vendor similar PIN <u>2/</u>
5962-0924301HXA 5962-0924301HXC 5962-0924301KXA 5962-0924301KXC	0ZBZ6 0ZBZ6 0ZBZ6 0ZBZ6	DVCH2805D/H-E DVCH2805D/H DVCH2805D/K-E DVCH2805D/K
5962-0924302HXA 5962-0924302HXC 5962-0924302KXA 5962-0924302KXC	0ZBZ6 0ZBZ6 0ZBZ6 0ZBZ6	DVCH2812D/H-E DVCH2812D/H DVCH2812D/K-E DVCH2812D/K
5962-0924303HXA 5962-0924303HXC 5962-0924303KXA 5962-0924303KXC	0ZBZ6 0ZBZ6 0ZBZ6 0ZBZ6	DVCH2815D/H-E DVCH2815D/H DVCH2815D/K-E DVCH2815D/K

- 1/ The lead finish shown for each PIN representing a hermetic package is the most readily available from the manufacturer listed for that part. If the desired lead finish is not listed contact the Vendor to determine its availability.
- 2/ Caution. Do not use this number for item acquisition. Items acquired to this number may not satisfy the performance requirements of this drawing.

Vendor CAGE
number

0ZBZ6

Vendor name
and address

VPT Incorporated
1971 Kraft Drive, Suite 1000
Blacksburg, VA 24060

The information contained herein is disseminated for convenience only and the Government assumes no liability whatsoever for any inaccuracies in the information bulletin.